






















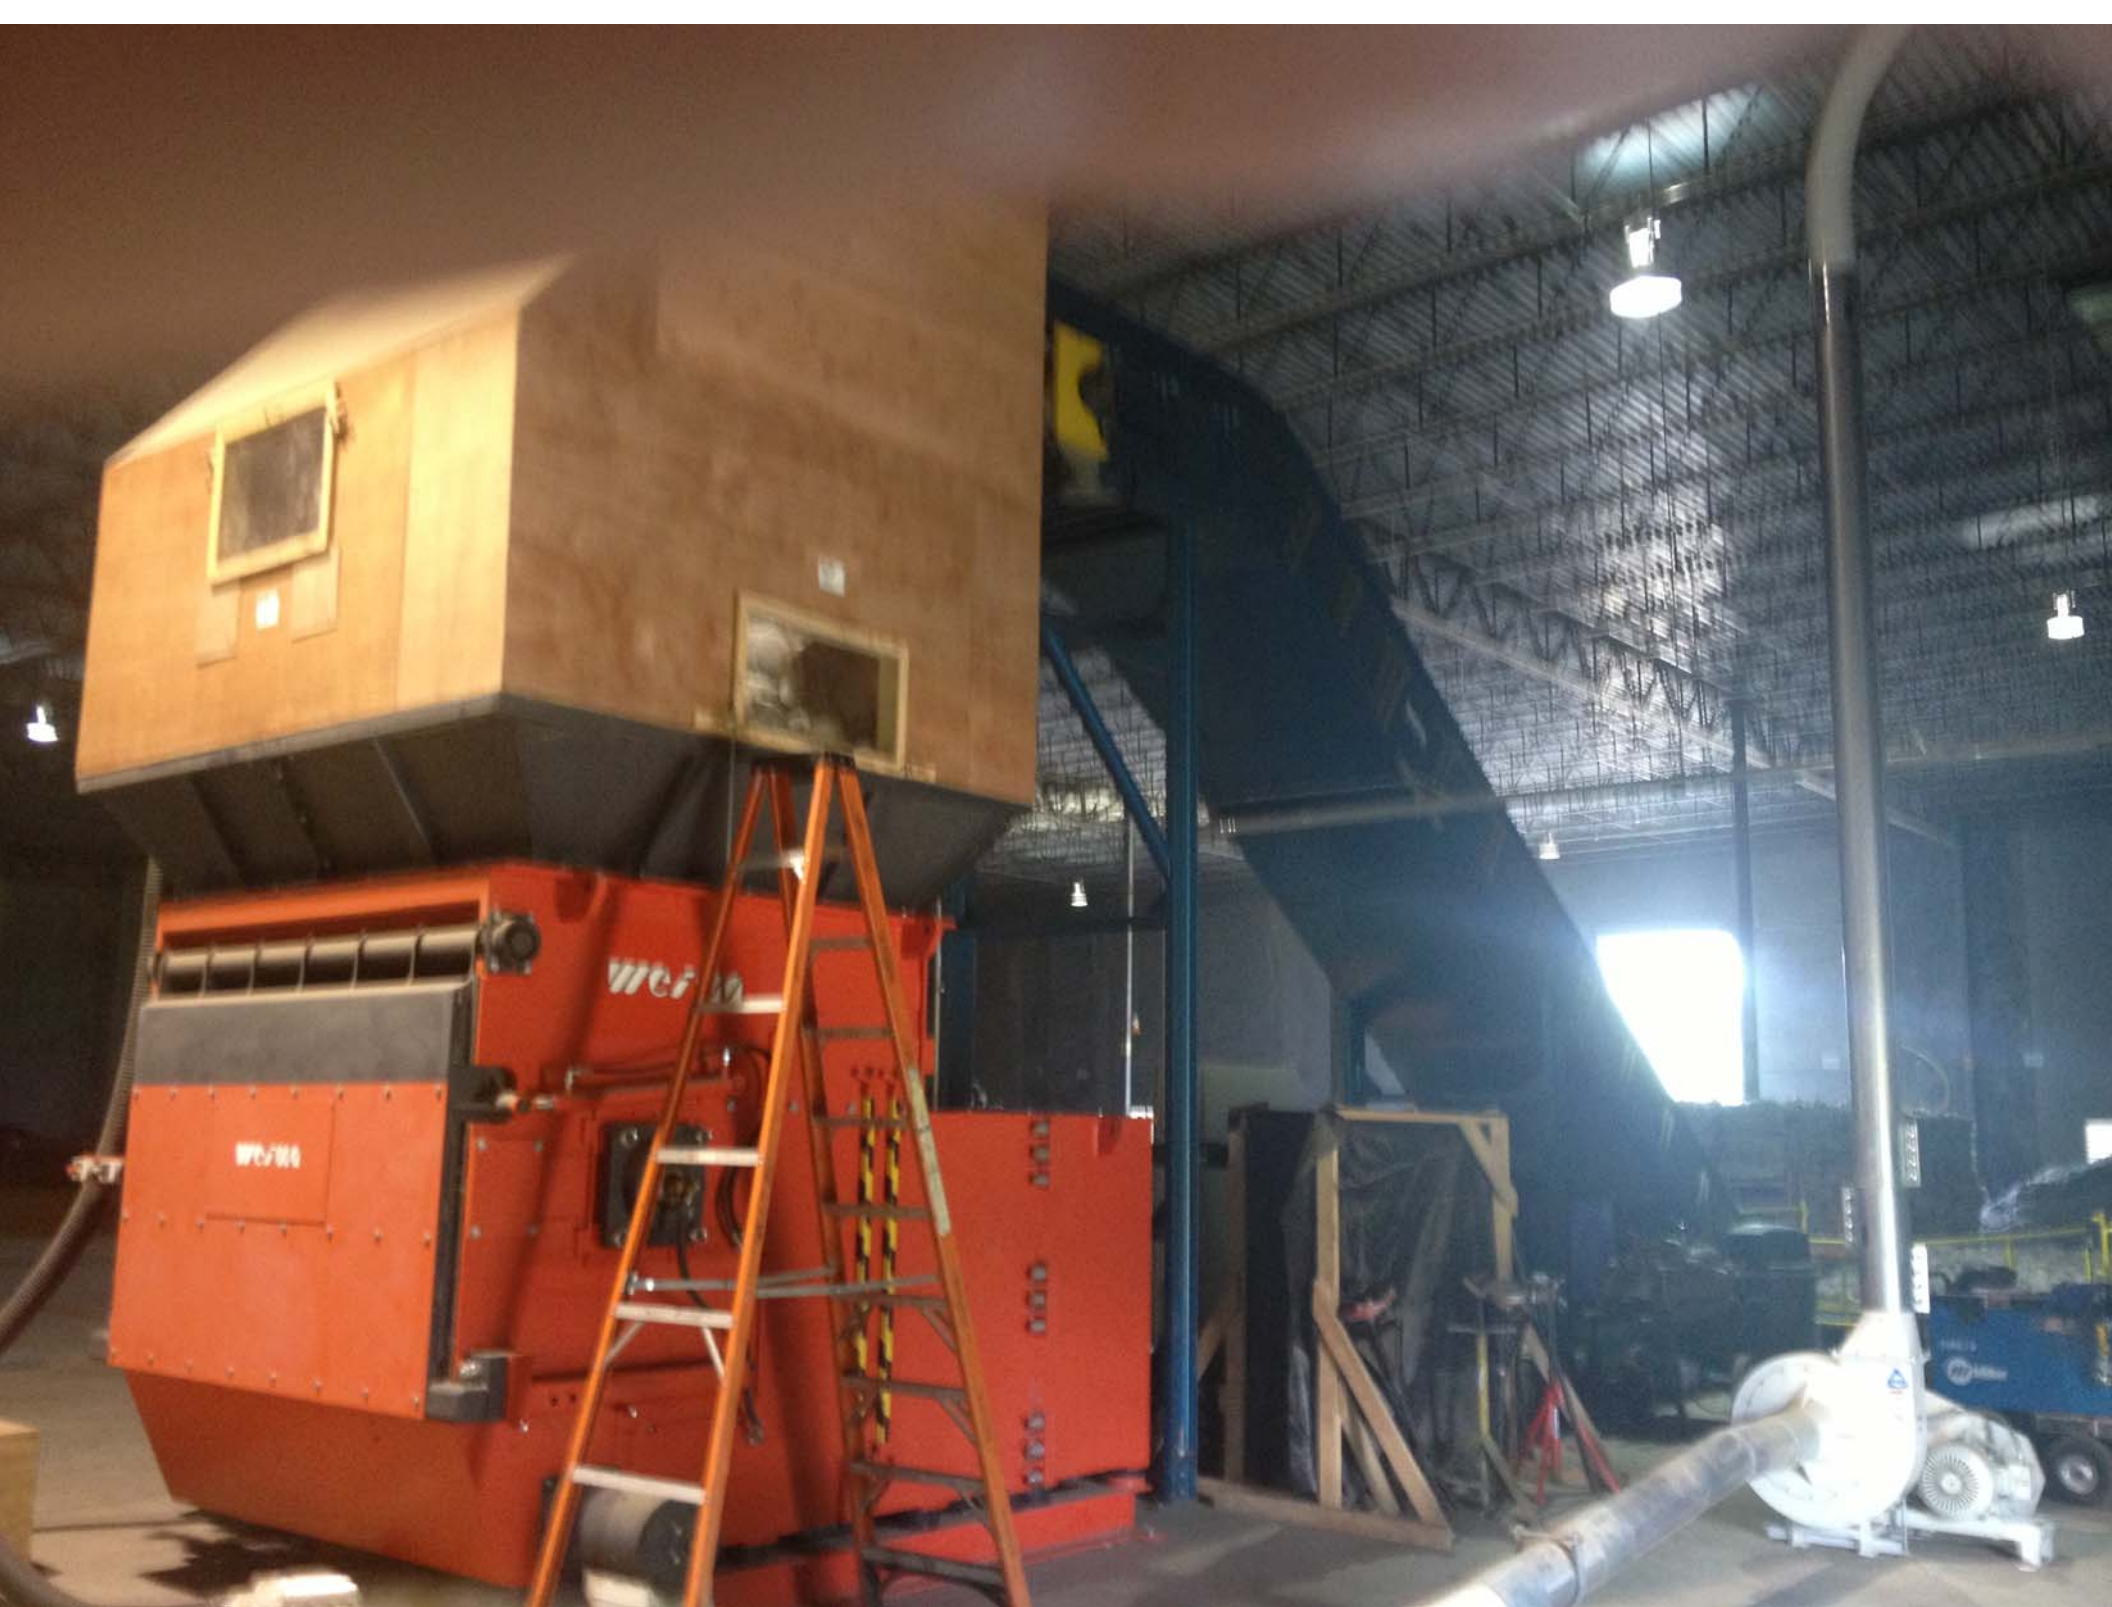


























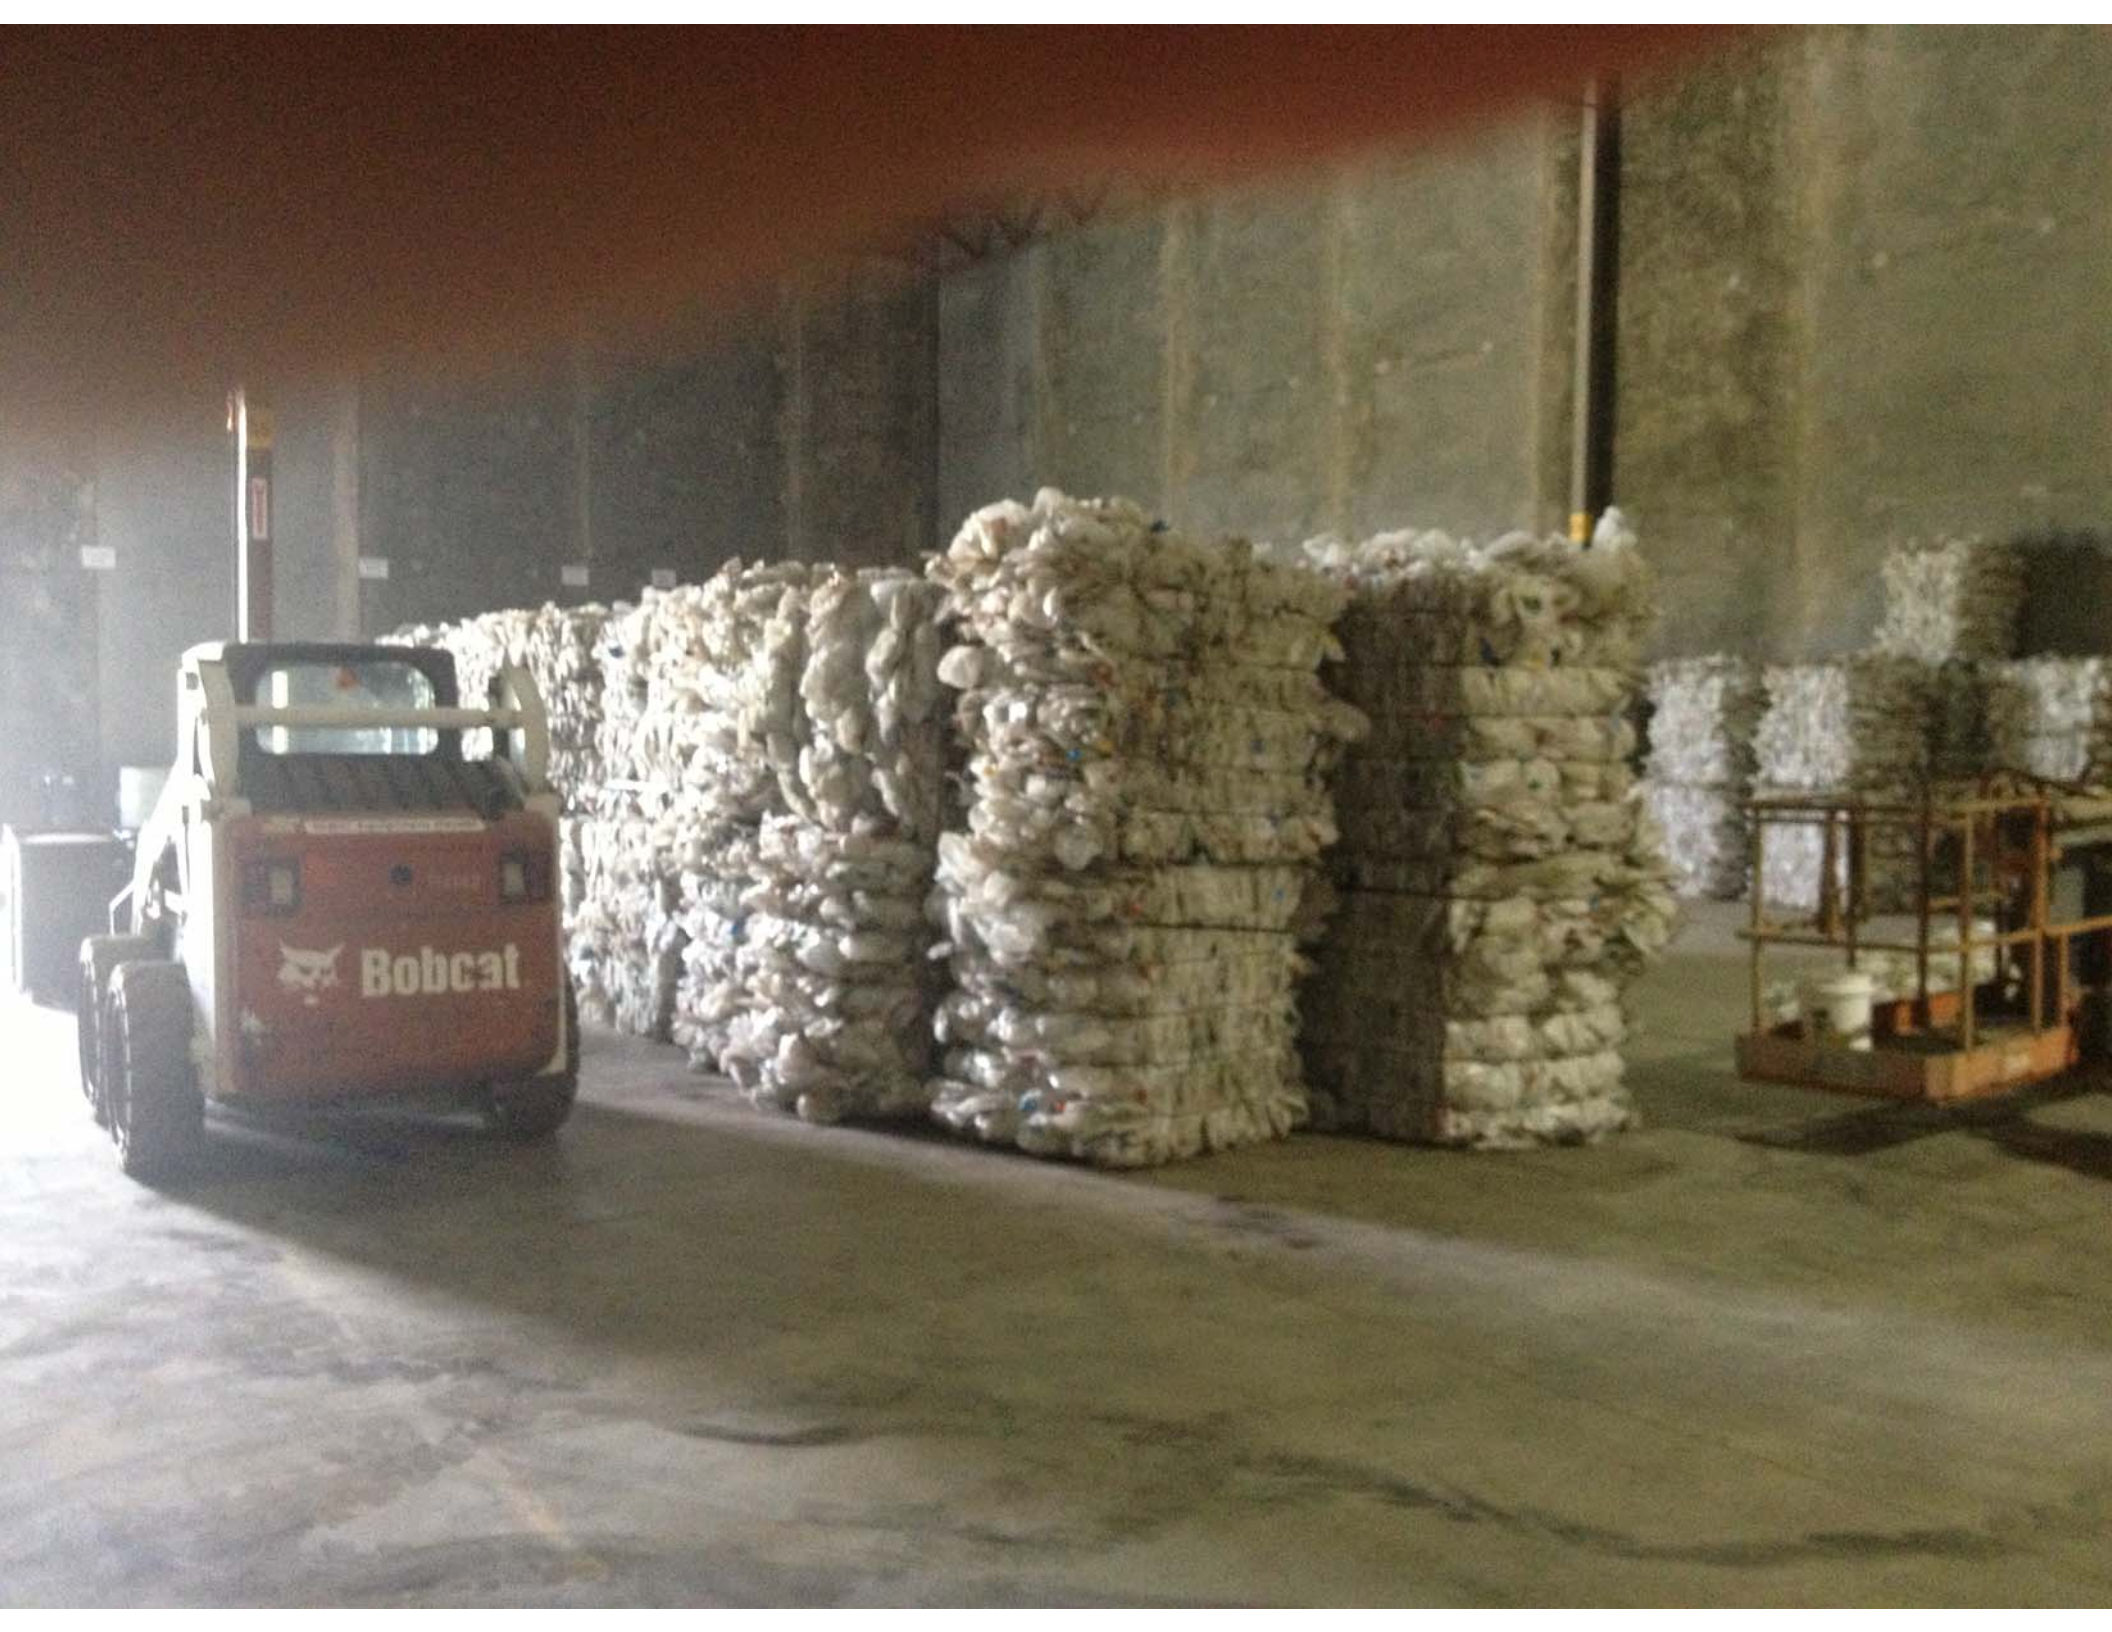









































































CLIMAX GLOBAL ENERGY
**AIR PURGED
ENCLOSURE**
KEEP DOORS SHUT WHILE IN
OPERATION













HOURS





FERRITE COMPONENTS, INC.
SYSTEMS GROUP
24 FLAGSTONE DRIVE, HUDSON, NH. 03051 U.S.A.

MANUFACTURING DATE: JUN 1998

MODEL : GET2000

SERIAL# 059




P/N: S10166-3


ELECTRICAL: 480 VAC, 3 PHASE, 60 HZ

MAXIMUM LOAD : 99 KVA

LARGEST MOTOR : 1.5 HP FLA: 2.2

SCHEMATIC DRAWING NO. S10066

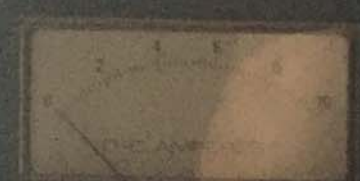

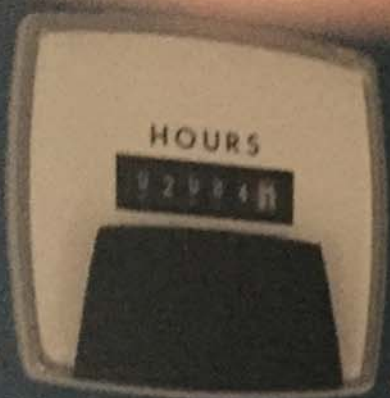

MAGNETRON HOURS



ANODE CURRENT



RE SET

HIGH



LOW

POWER SELECT

NORMAL



BYPASS

REMOTE



LOCAL

RATSE



LOWER

AUTOMATIC



MANUAL



CONTROL



FILAMENT/SOLENOID



CONTROL



SOLENOID CURRENT




UL 923









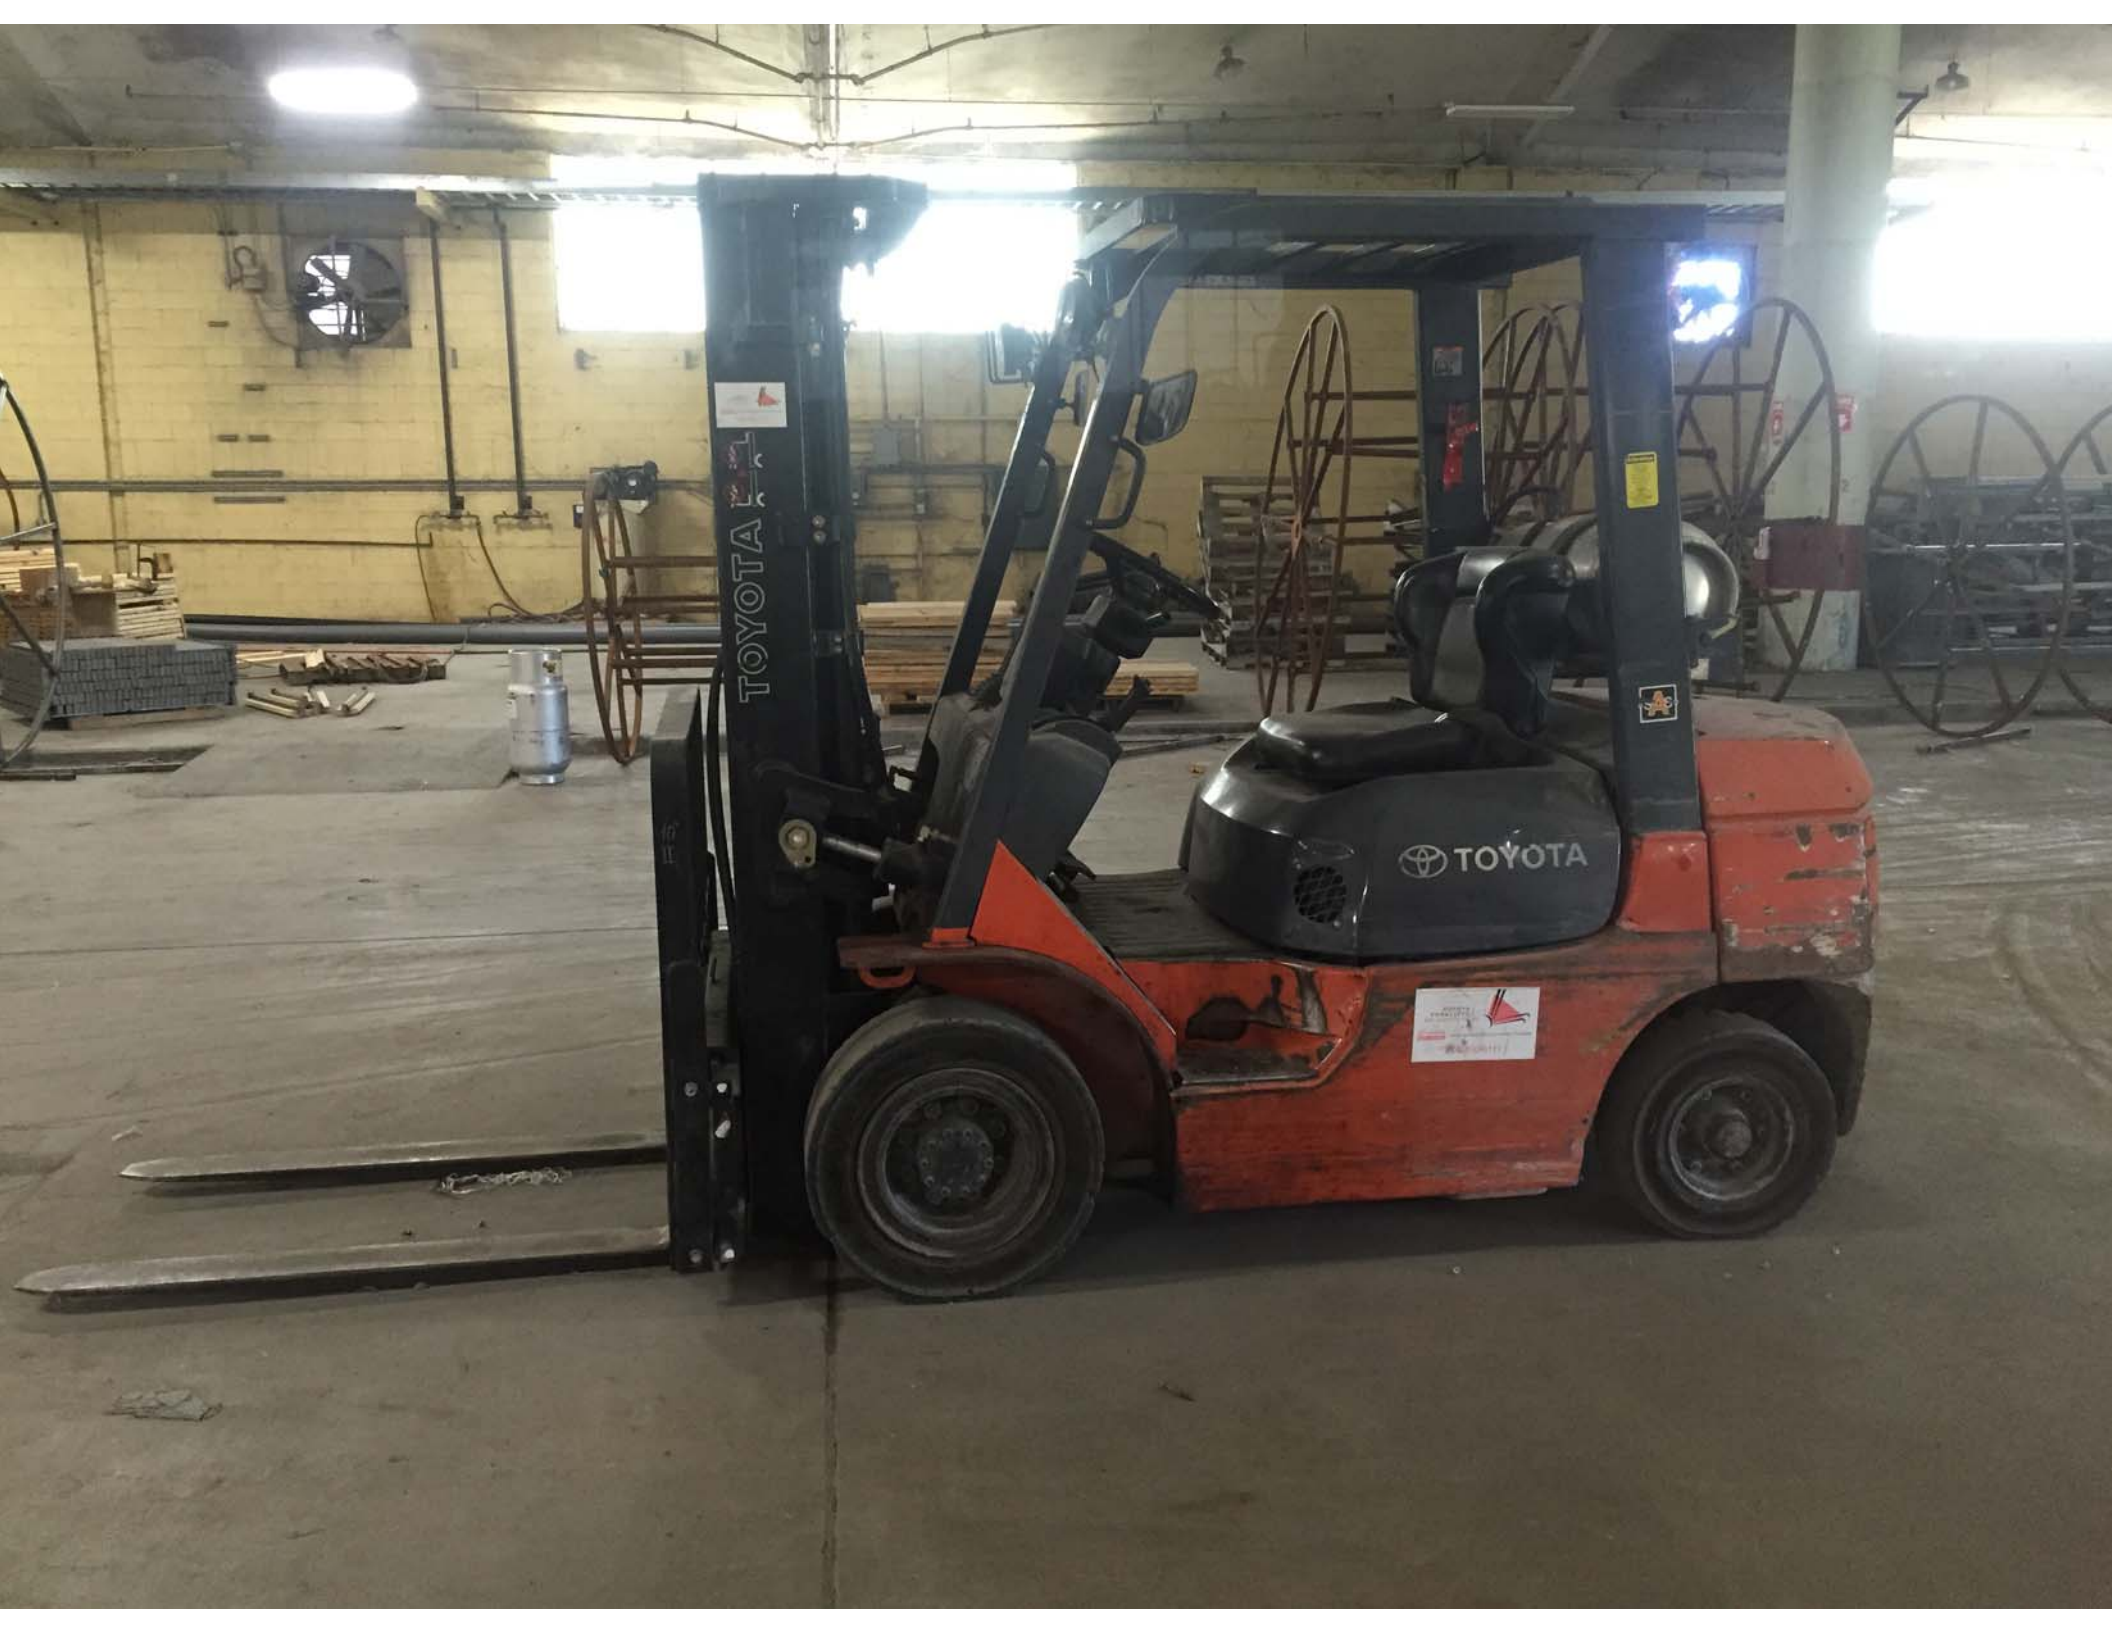















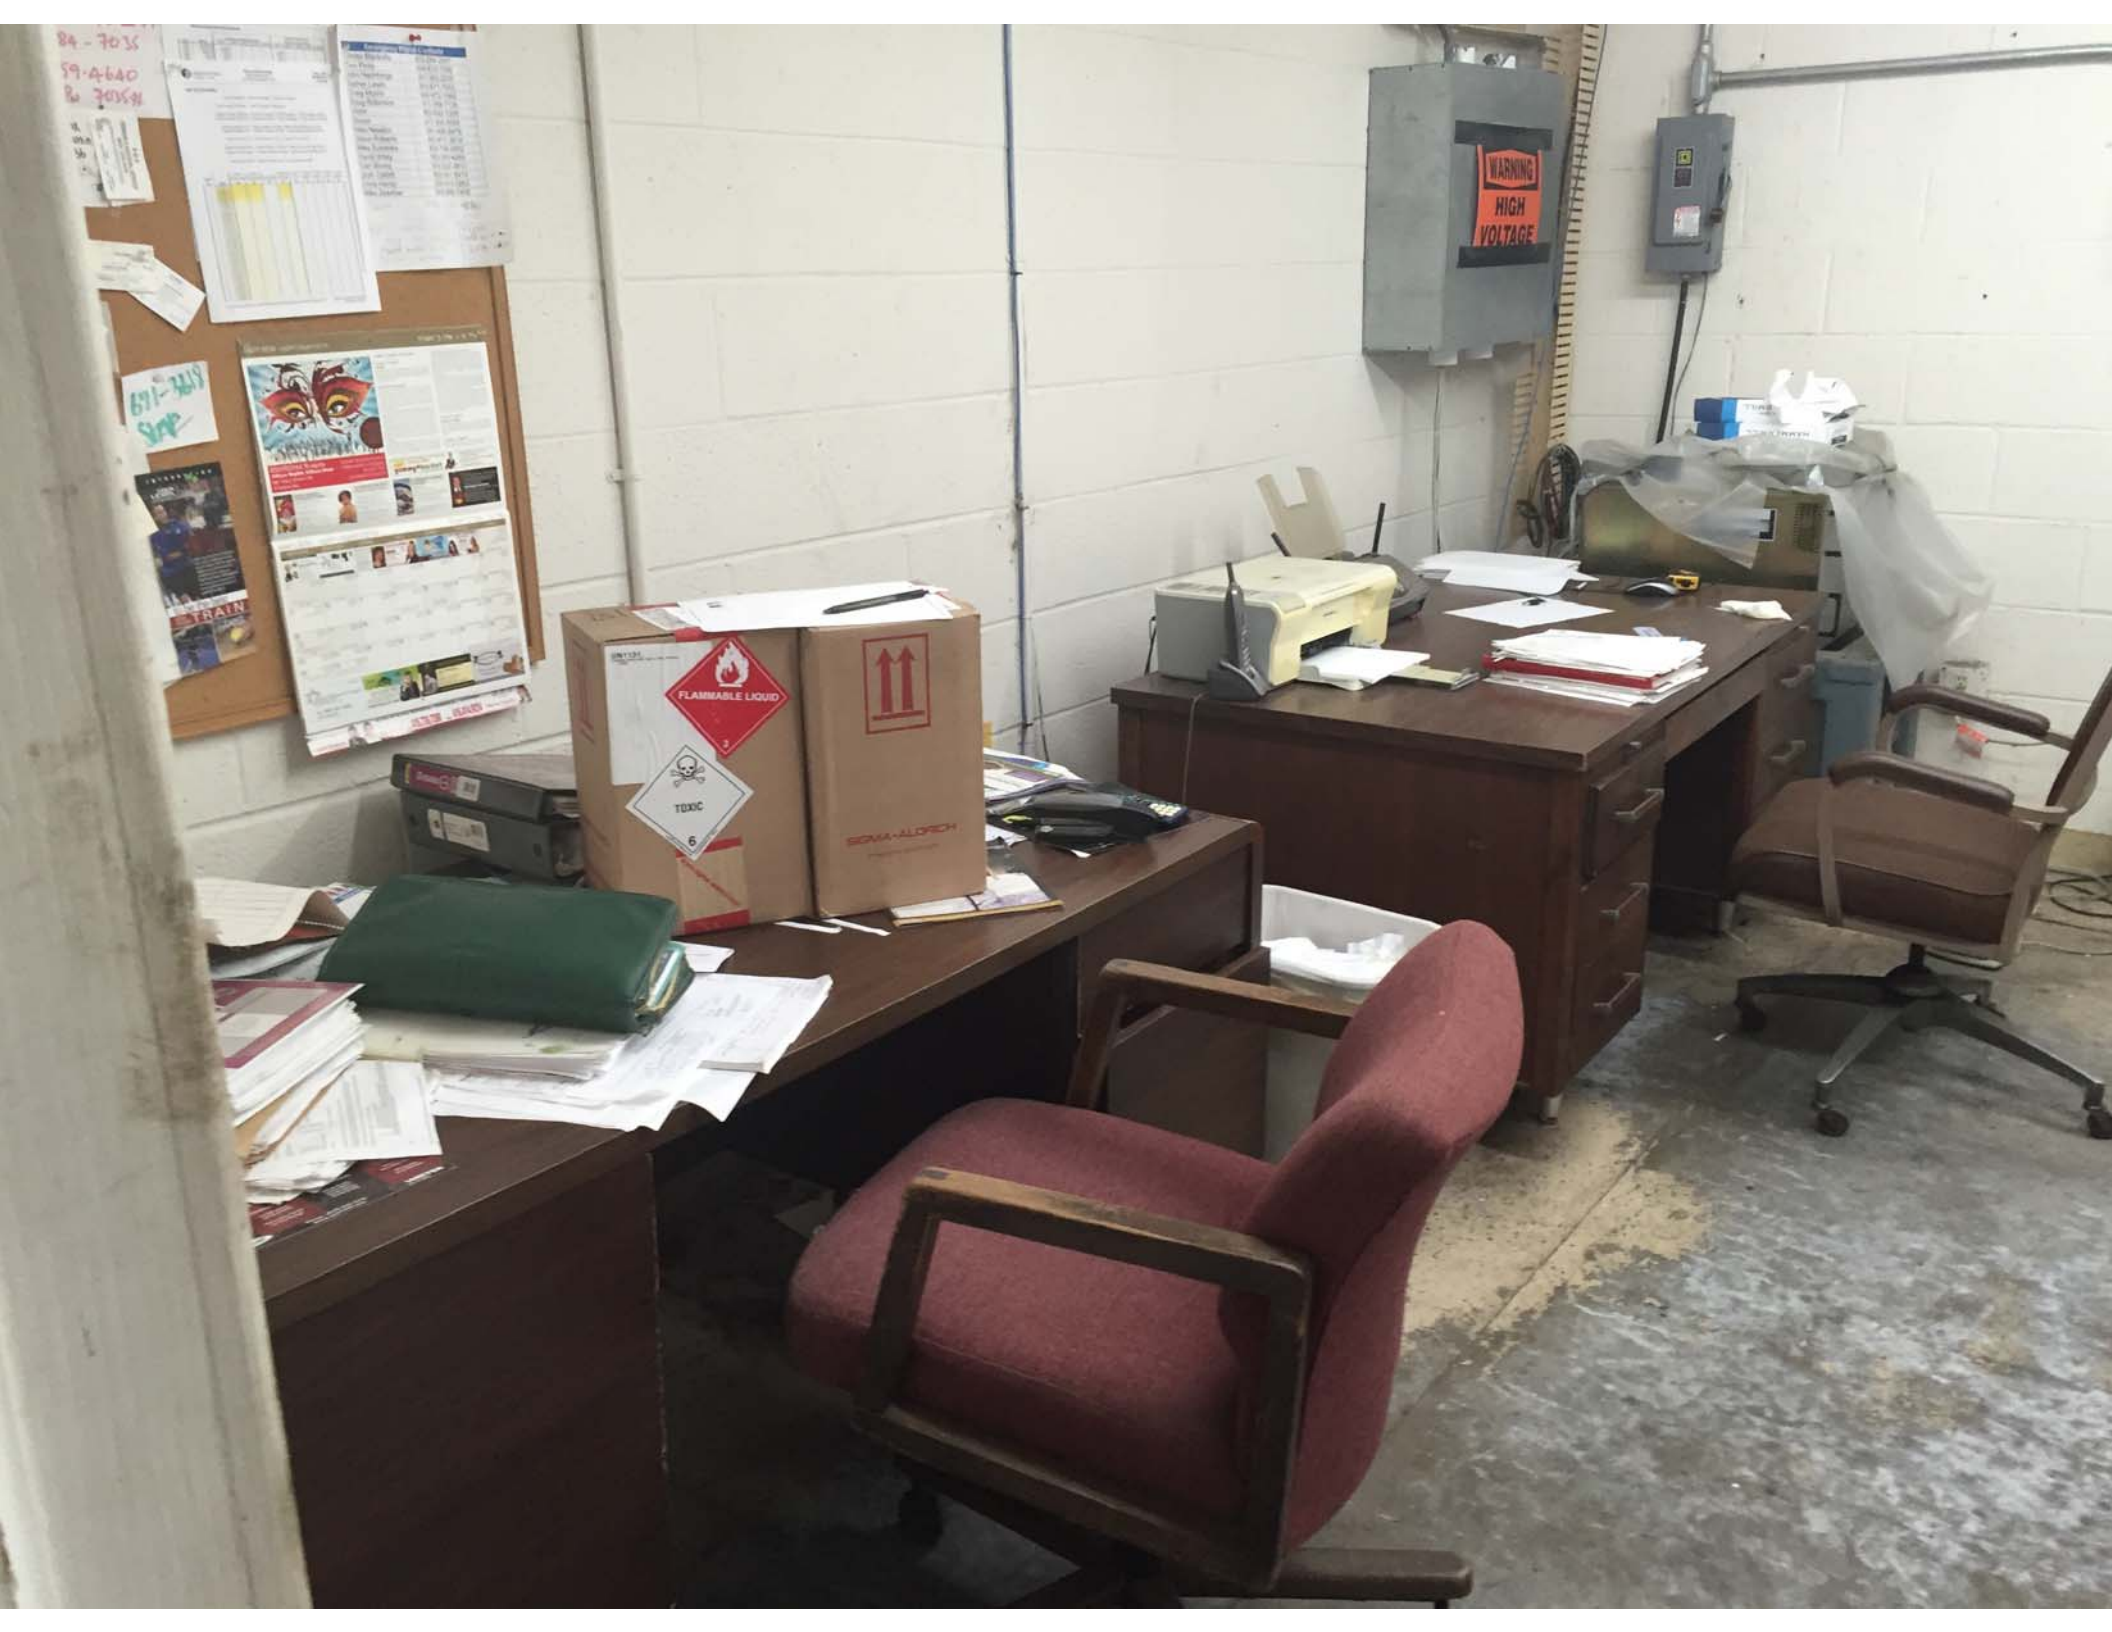

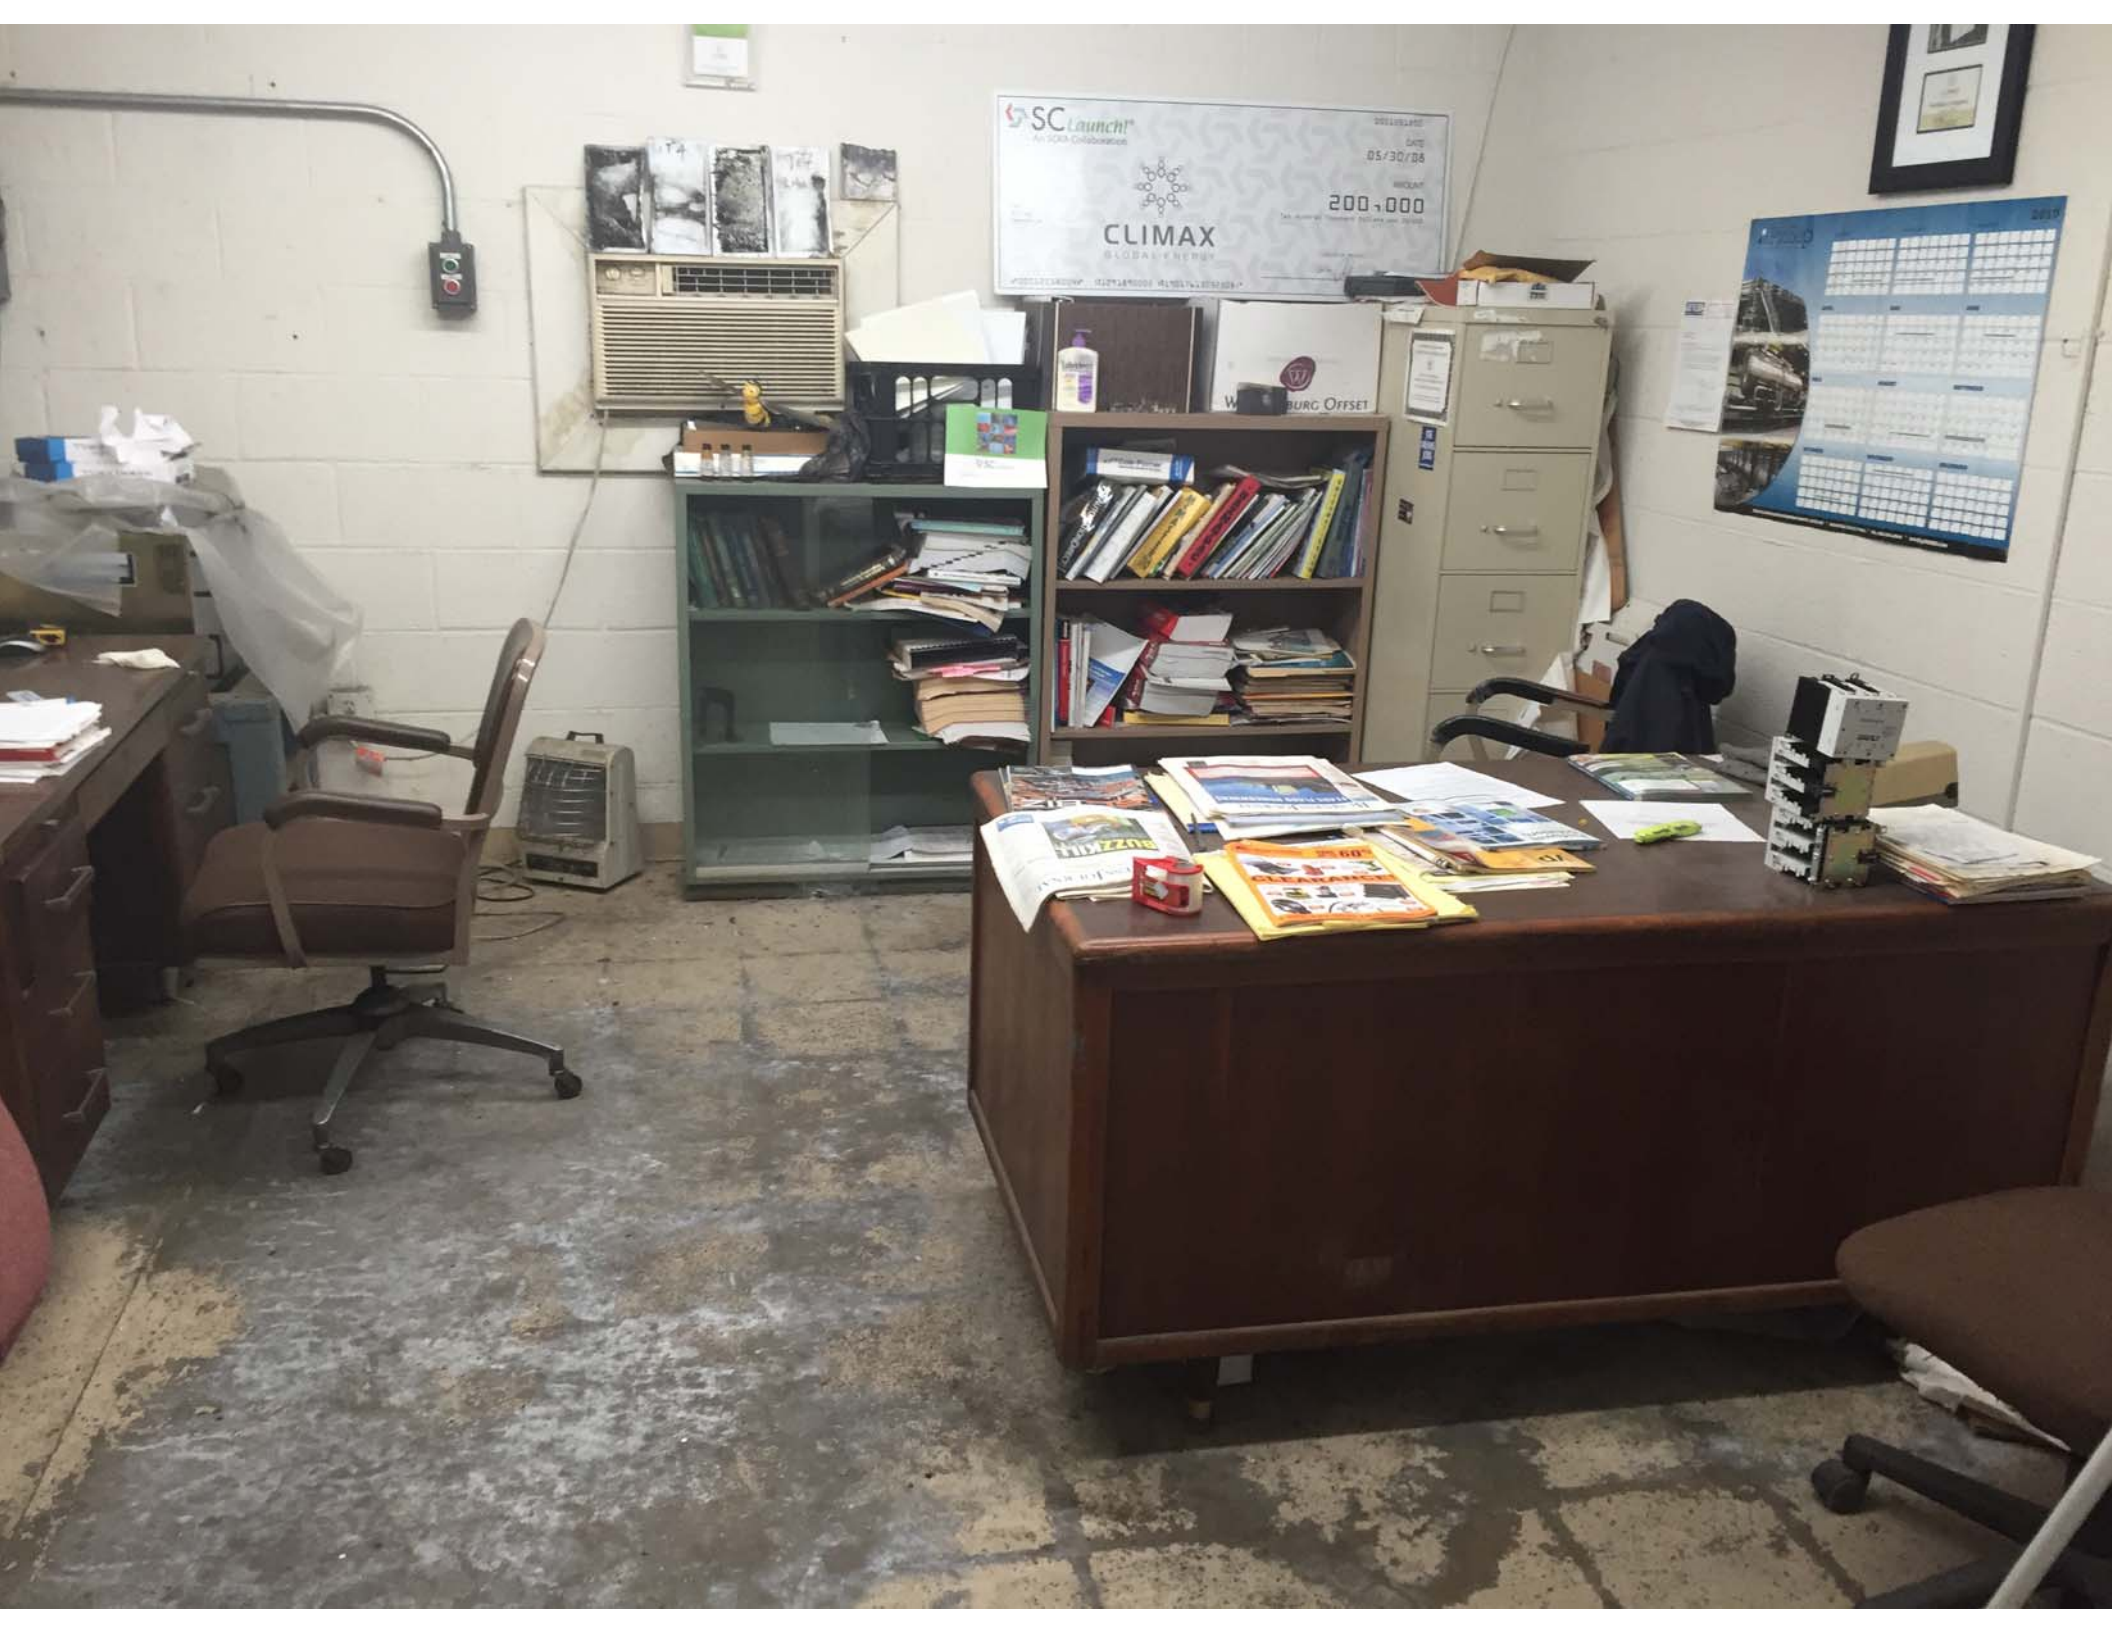

SC Launch!®
An SQA Collaboration


05/30/08


200,000

CLIMAX
GLOBAL ENERGY





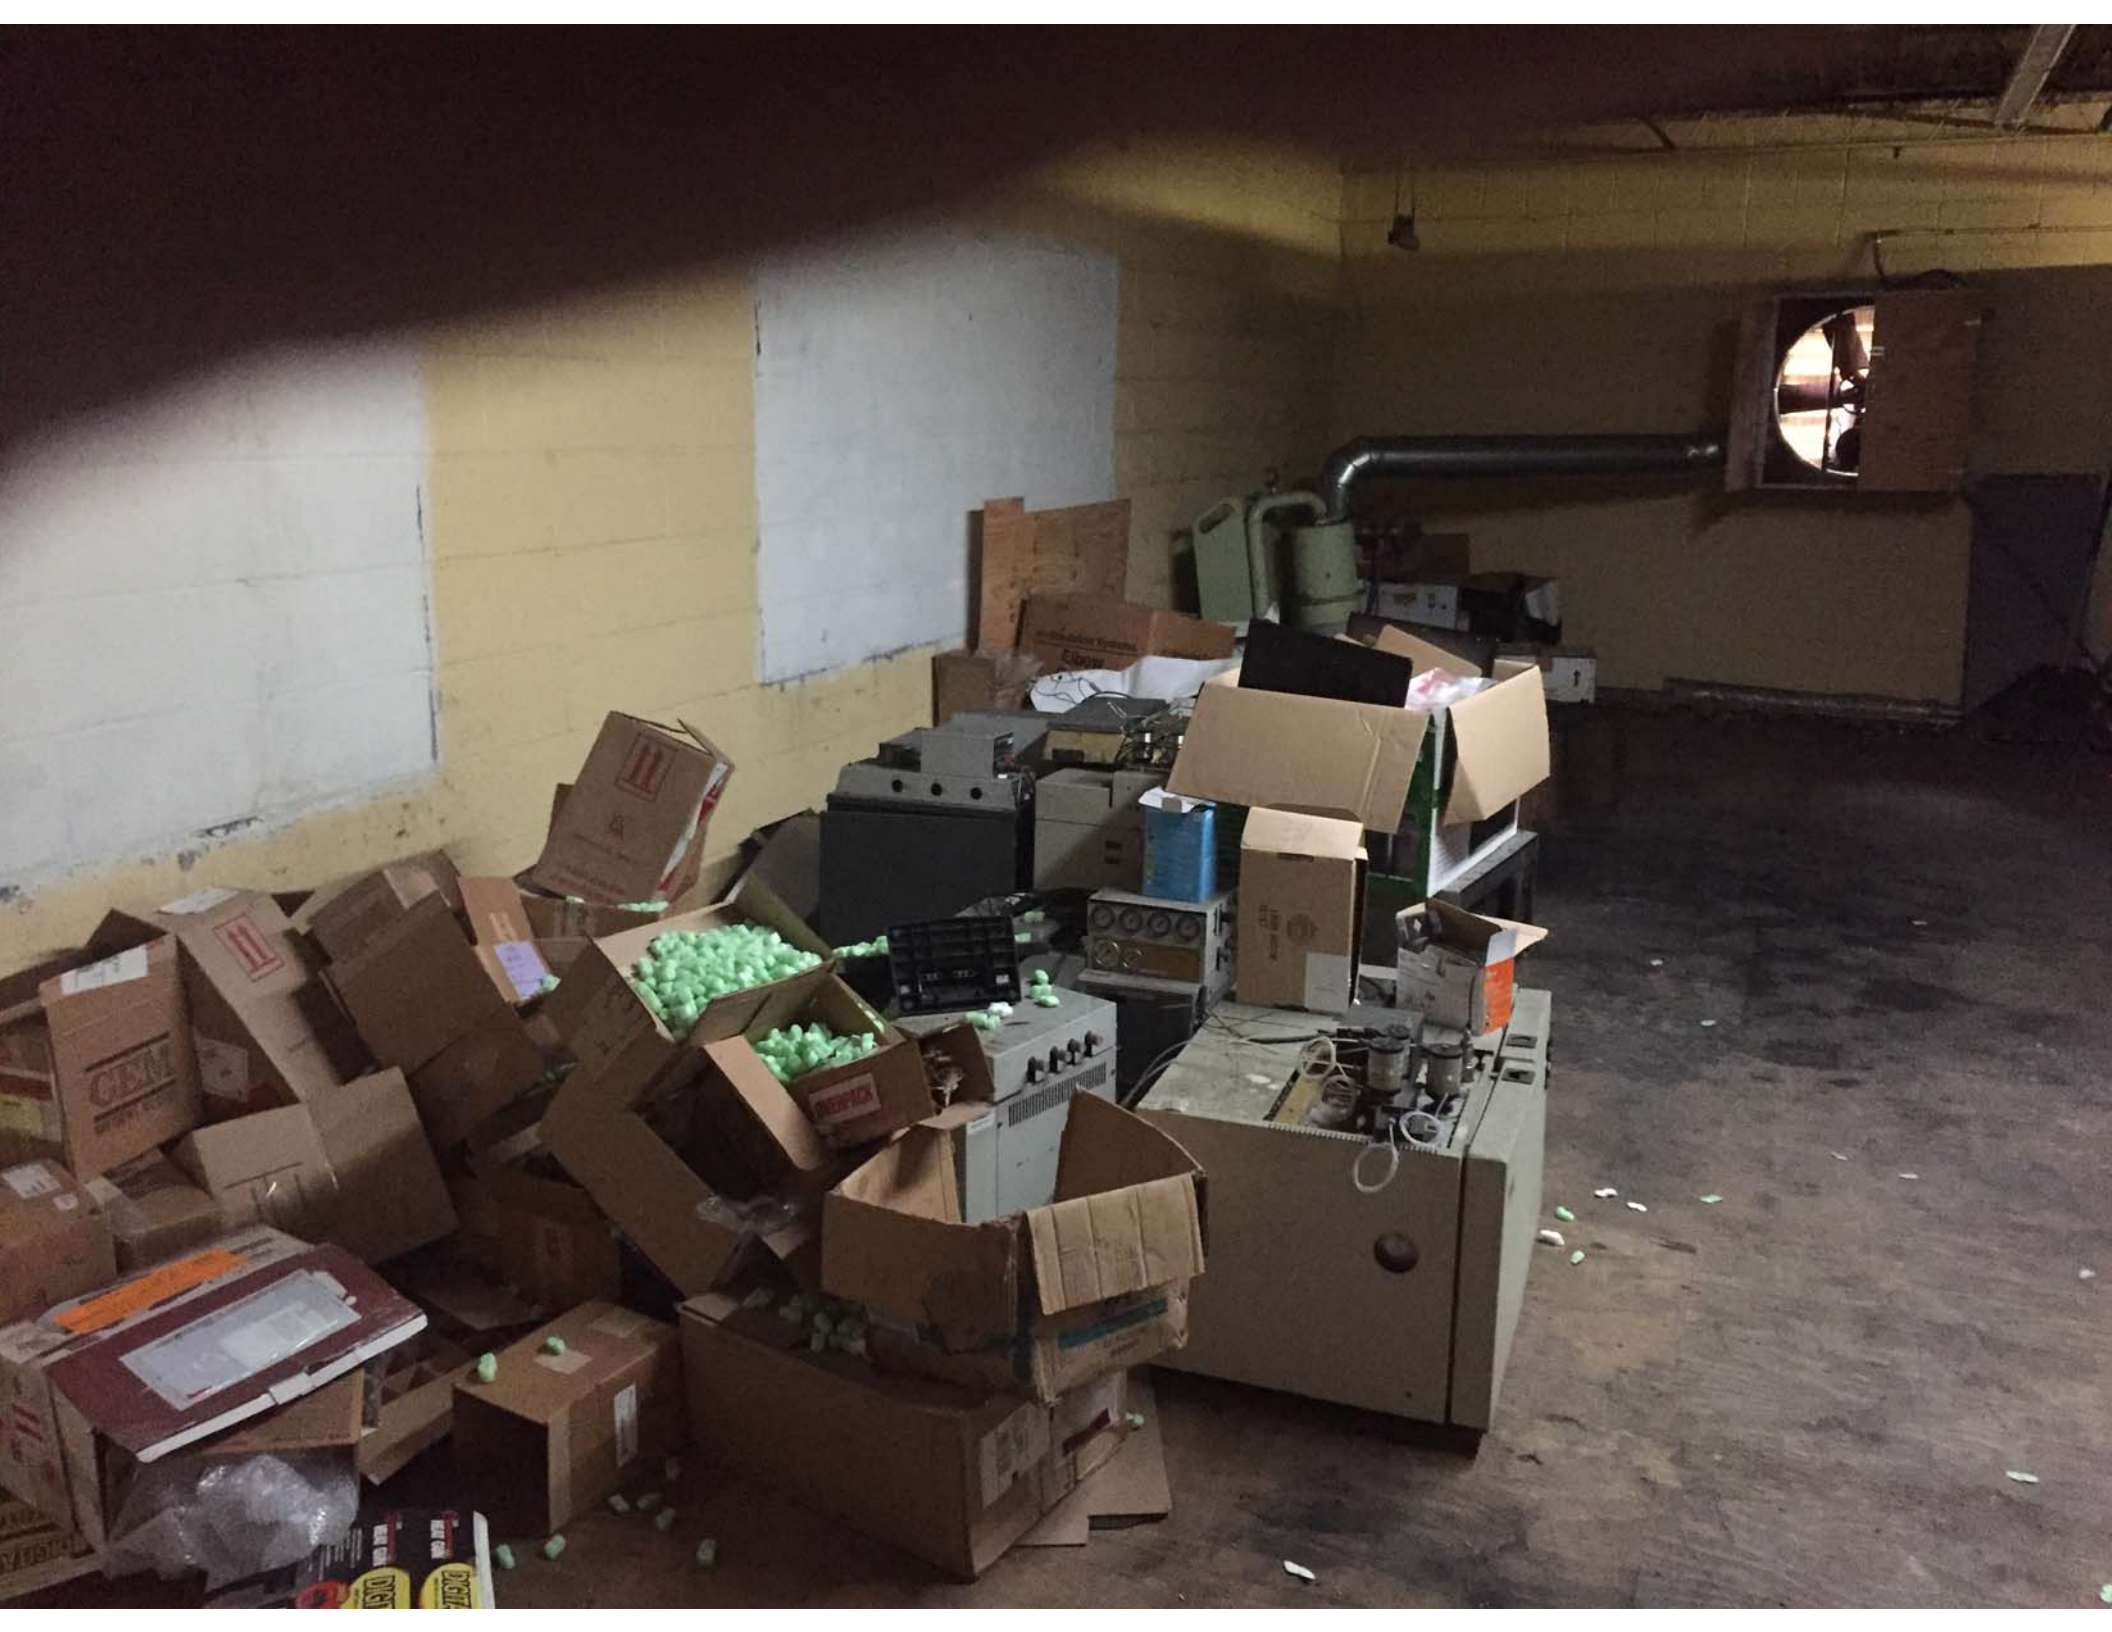

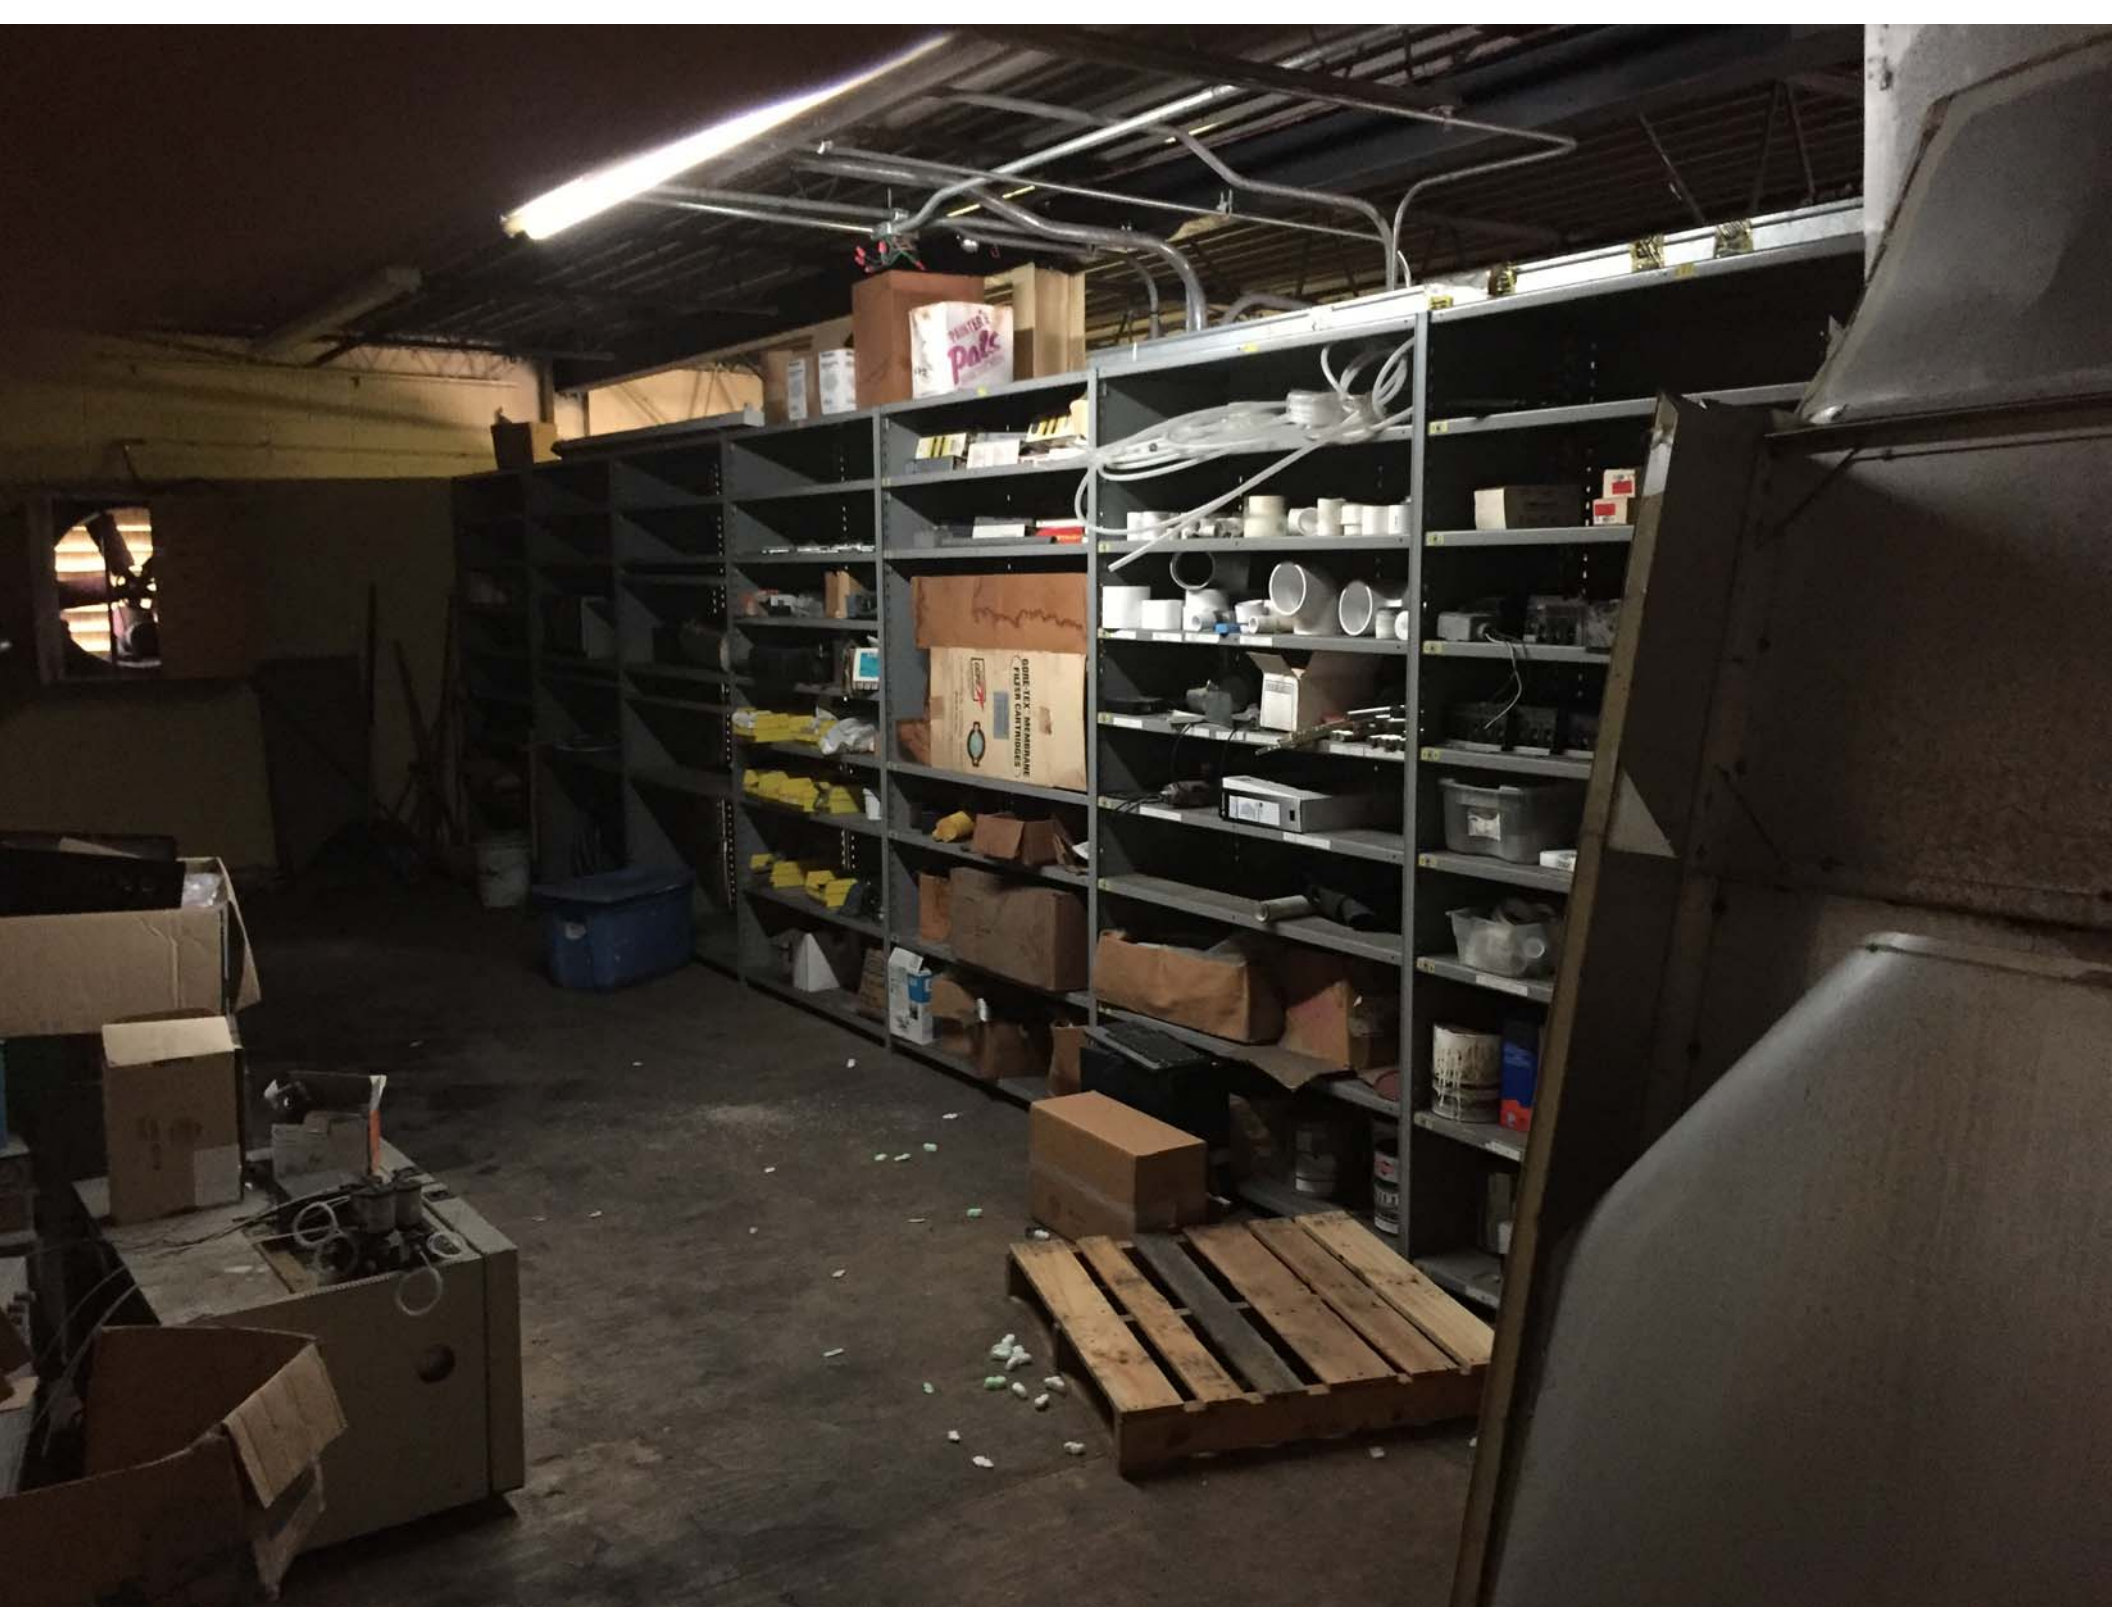











SCIENCES

MAXIMUM
PORTABLE CHILLER

Thompson's
Water Seal
MAINTENANCE



Insulation Systems
Elbow
Covers

Zircor

CAUTION
FRAGILE
UP

UP

Insulation Systems
Elbow
Covers





